




**UNIQUE METAFLEX COUPLINGS**  
**Series 80 SPL Coupling**

This is a simple variation of basic Series 80 design with large hub at one end. This is especially suitable for Motor driven pumps where Motor shaft dia is much larger than pump shaft dia. Coupling OD/Weight/ Inertia and costs are minimum in this style for a given drive.

**GENERAL ASSEMBLY DRAWING**

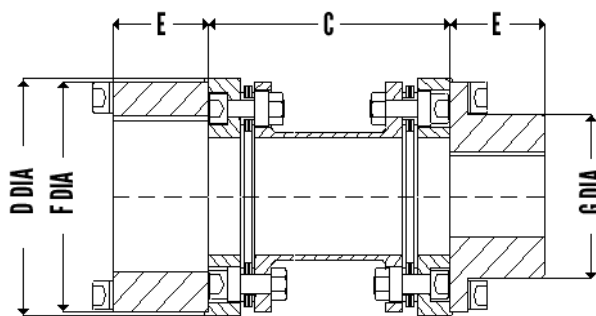

**DIMENSIONS AND STANDARD SIZES**

Size	Nominal HP/100 RPM	Rating Torque NM	Peak Torque NM	Max Speed RPM	Max Bore D1 MM	Max Bore D2 MM	D Dia MM	G Dia MM	F Dia MM	E, Hub Length MM	Std C MM
65	0.45	32	64	25000	28	42	66	42	63	28	100
80	0.90	64	128	25000	38	48	75	54	72	30	100
100	1.80	128	256	25000	42	55	87	60	83	32	100
125	2.60	185	370	20000	48	65	102	70	98	41	100
150	4.00	285	570	20000	48	70	105	69	102	45	100
162	7.00	500	1000	18000	55	75	115	80	111	48	140
180	9.00	640	1280	18000	65	90	130	90	125	55	140
200	12.00	855	1710	16000	70	95	143	100	138	54	140
220	15.00	1070	2140	16000	80	102	152	112	148	62	140
225	18.00	1282	2564	14600	75	100	150	110	145	67	140
250	25.00	1780	3560	12300	90	115	173	130	168	76	140
262	33.00	2350	4700	12300	90	115	173	130	168	76	140
300	56.00	3990	7980	11000	110	140	203	157	198	86	180
312	56.00	3990	7980	11000	110	140	203	157	198	86	180
350	70.00	4990	9980	10500	115	155	227	162	221	95	180
375	100.00	7125	14250	10000	130	170	252	187	246	102	200
425	140.00	9975	19950	8000	130	185	273	191	273	108	200
450	170.00	12110	24220	7000	145	200	293	211	293	114	250
500	270.00	19230	38460	6000	175	230	333	251	333	127	250

Mass, Inertia, Stiffness are at max bore with standard spacer dimension C listed above. Other C dimension are available as required on request . Hub dimensions can be modified to suit special needs. Max angular misalignment 0.50 Deg /Pack. Misalignment limits are for speeds upto 3000 RPM. For higher Speeds consult us. Bolt Tightening Torques - # for Disc Pack Bolts , ## for Hub Bolts.





**UNIQUE METAFLEX COUPLINGS**

**Series 80 SPL Coupling**

**ENGINEERING DATA**

Size	Mass	Inertia MR <sup>2</sup>	Maximum Misalignment		Tor. Stiff	Axial Spring	Bolt Tight Torque	
	KG	KG.M <sup>2</sup>	AXIAL MM	RADIAL MM	MNM/Ra	Rate N/MM	# NM	## MM
65	1.6	0.001	1	0.6	0.01	25	6	6
80	2.3	0.002	1.2	0.6	0.02	30	10	6
100	3.2	0.003	2	0.6	0.06	50	24	10
125	5.0	0.008	2	0.8	0.06	60	24	24
150	5.3	0.008	1.3	0.8	0.06	150	24	24
162	7.2	0.013	1.3	1.2	0.18	100	24	24
180	9.7	0.025	1.5	1.2	0.20	130	48	48
200	12.2	0.037	1.8	1.2	0.20	165	48	48
220	15.1	0.052	2.0	1.2	0.26	130	48	48
225	15.7	0.051	1.4	1.2	0.26	275	48	48
250	21.5	0.099	2.2	1.2	0.38	195	48	48
262	21.5	0.099	1.5	1.2	0.44	350	48	48
300	36.0	0.222	3.0	1.2	0.64	370	200	80
312	32.2	0.203	1.9	1.2	0.64	415	80	80
350	46.0	0.370	2.0	1.2	1.07	500	200	200
375	61.0	0.580	2.3	1.5	1.38	540	200	200
425	85.0	0.990	2.5	1.5	2.14	725	400	400
450	106.0	1.420	2.8	1.7	2.36	755	400	400
500	137.0	2.470	3.0	1.9	3.92	920	400	400

Mass, Inertia, Stiffness are at max bore with standard spacer dimension C listed above. Other C dimension are available as required on request . Hub dimensions can be modified to suit special needs. Max angular misalignment 0.50 Deg /Pack. Misalignment limits are for speeds upto 3000 RPM. For higher Speeds consult us. Bolt Tightening Torques - # for Disc Pack Bolts , ## for Hub Bolts.

*All Dimensions are in "mm" unless specified.  
The dimensions are for standard execution and subject to change without notice.*

